



BEAM 6


FAST & LIGHTWEIGHT LED BEAM



- 1.5° BEAM ANGLE
- FAST MOVEMENTS
- ROTATABLE LENS FOR SPECIAL BEAM EFFECTS
- LCD TOUCHSCREEN FOR MENU SETTINGS
- ONLY 3.8KG

The Beam 6 is a small and lightweight LED fixture which delivers a powerful 1.5° beam. Additionally, the kaleidoscopic effect offers a wide effect scope. All settings of the Beam 6 can be adjusted in the on board touch screen.

Due to its small footprint and weight, the Beam 6 is ideal for matrix effects. Fast and precise movements complete the feature set. The fixture is equipped with 5 pin DMX, PowerCON input and output.

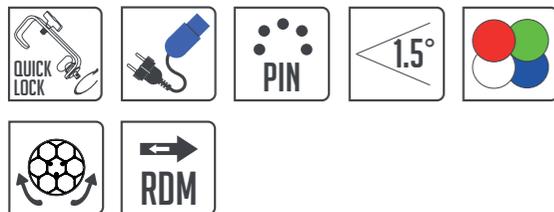

PHYSICAL

LENGTH	226MM
WIDTH	226MM
HEIGHT (HEAD VERTICAL)	286MM
NET WEIGHT	3.8KG

EFFECTS

COLOR	RGBW COLOR SYSTEM
KALEIDOSCOPIC EFFECT	6° - 51°
SHUTTER	VARIABLE 0 - 100%, RANDOM & PULSE
DIMMER	0 - 100%

OPTICAL

SOURCE	6X 10W RGBW 4 IN 1 LEDS
AVERAGE LIFESPAN	50000H
BEAM ANGLE	6° - 51°

PHOTOMETRIC

OUTPUT	10600 LX @ 3M
--------	---------------

CONNECTIONS

POWER	POWERCON IN AND OUT
DATA	5 PIN LOCKING XLR

CONTROL

SETTINGS	TFT TOUCHSCREEN
PROTOCOLS	DMX512 & RDM
CHANNELS	11 - 17
UPDATES	BY DMX

INSTALLATION

MOUNTING	OMEGA BRACKET
ORIENTATION	ANY
PROTECTION RATING	IP20
SAFETY	ATTACHMENT POINT

MOVEMENTS

PAN	540°
TILT	180°

ELECTRICAL SPECIFICATION

INPUT	100 - 240V, 50/60HZ
POWER CONSUMPTION	91W

ELECTRICAL SPECIFICATION

MIN. AMBIENT TEMP.	-5°C
MAX. AMBIENT TEMP.	35°C
COOLING	FORCED AIR

ORDERING

CLF BEAM 6	160000
USER MANUAL, POWER CABLE & DMX CABLE	

APPROVALS

CE COMPLIANT
ROHS

OPTIONAL FLIGHTCASE

